



DO NOT BEND CABLES EXCESSIVELY
Ø 200MM (7.87 IN) / R 100MM (3.94 IN) MINIMUM

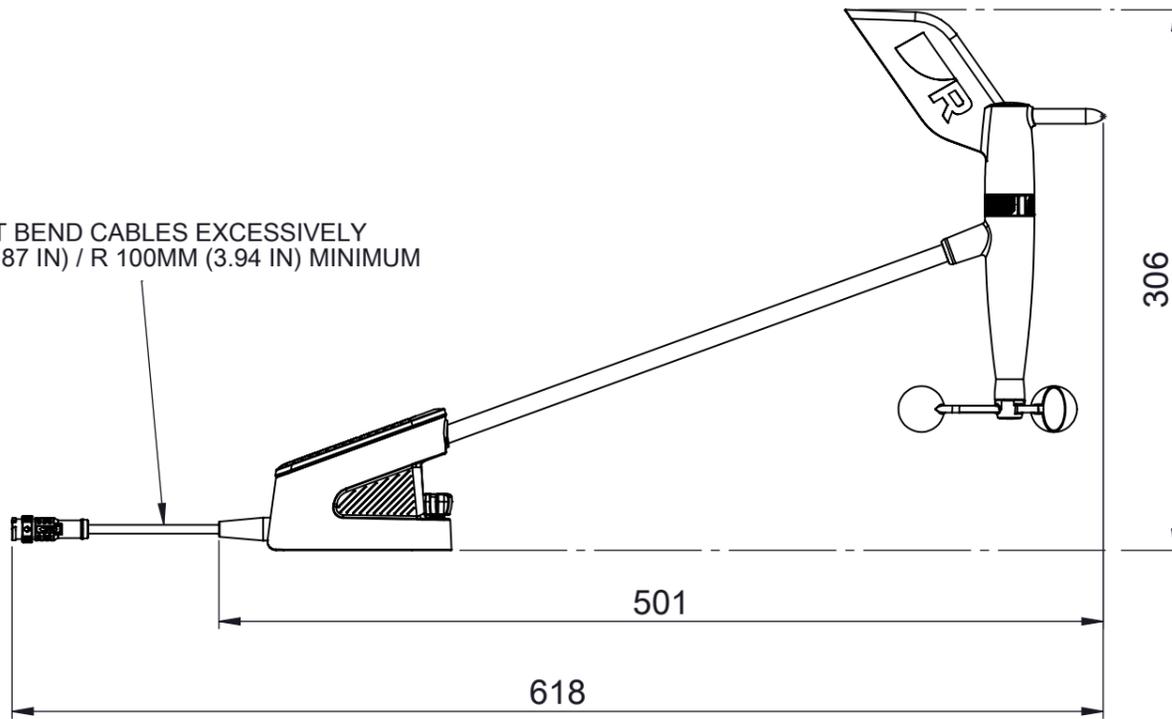

SIDE VIEW

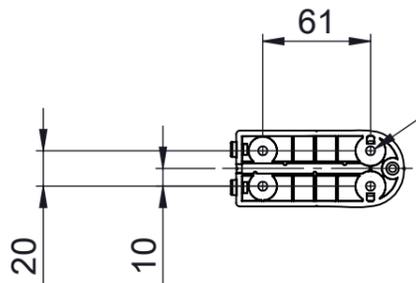


PILOT HOLE (4 POS) SIZE MUST BE SUITABLE FOR THE MATERIAL TYPE AND THICKNESS OF THE MOUNTING SURFACE (E.G.: A 4MM (5/32 IN) DRILL BIT SHOULD BE USED WHEN MOUNTING ON AN ALUMINIUM SURFACE).

VIEW OF UNDERSIDE OF MOUNTING BRACKET



DO NOT BEND CABLES EXCESSIVELY
Ø 200MM (7.87 IN) / R 100MM (3.94 IN) MINIMUM

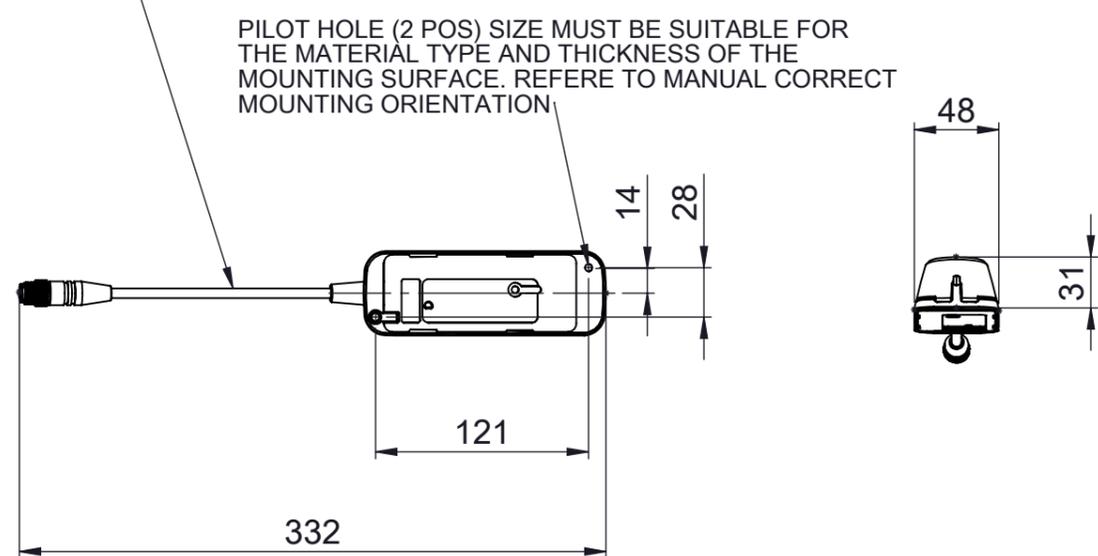

PILOT HOLE (2 POS) SIZE MUST BE SUITABLE FOR THE MATERIAL TYPE AND THICKNESS OF THE MOUNTING SURFACE. REFER TO MANUAL CORRECT MOUNTING ORIENTATION


NOTES:

- 1) FOR INFORMATION ON CONNECTIONS AND PRODUCT SPECIFICATIONS, PLEASE REFER TO HANDBOOK, PRODUCT SUPPORT AND WORKSHOP MANUALS.
- 2) FOR ANY DIMENSIONAL INFORMATION NOT INCLUDED PLEASE CONTACT YOUR SALES REPRESENTATIVE.
- 3) DIMENSIONS SHOWN ARE ACTUAL PRODUCT SIZE AND DO NOT INCLUDE ANY CLEARANCE DATA.

Raymarine

© 2019 RAYMARINE LTD
Company Confidential

THE INFORMATION CONTAINED HEREIN SHALL NOT BE REPRODUCED WITHOUT THE PRIOR WRITTEN PERMISSION OF RAYMARINE LTD



DRAWN TO BS308



DO NOT SCALE - IF IN DOUBT ASK

DRN:	MA	DATE: 2023-07-20
DIMENSIONS IN MM		SCALE: 1:4

TITLE	SMART WIND WIRED_SM
DRAWING No.	SMART WIND WIRED_SM